

# SPEKTOR



## EQUUS\_39\_Cable

EQUUS\_39\_BZ\_NB\_3K\_6W  
EQUUS\_39\_SS\_NB\_3K\_4W

### Product description

Single body spotlight for versatile mounting in- and outdoors, also harsh environments. No visible hardware. Made of bronze(BZ) with more than 90% copper or stainless steel SS316(SS). Narrow beam(NB) TIR-lens made of PMMA. High power LED with 3000Kelvin(3K) colour temperature. Different light distributions and colour temperatures can be achieved with accessory filters.

Clear covers made of 10mm thick PMMA sealed with Silicone gaskets. Mounting slot, 11mm wide, allowing fixation and aiming with single bolt/screw.

Protection class IP67

Impact protection IK10

Ta max =40 degree Celsius

Ta life =25 degree Celsius


Wind catching area 0.007sqm

weight

0.85kg (SS316), 0.93kg (bronze)

Comes pre-installed with robust 1.0m mains cable.

# EQUUS\_39\_Cable

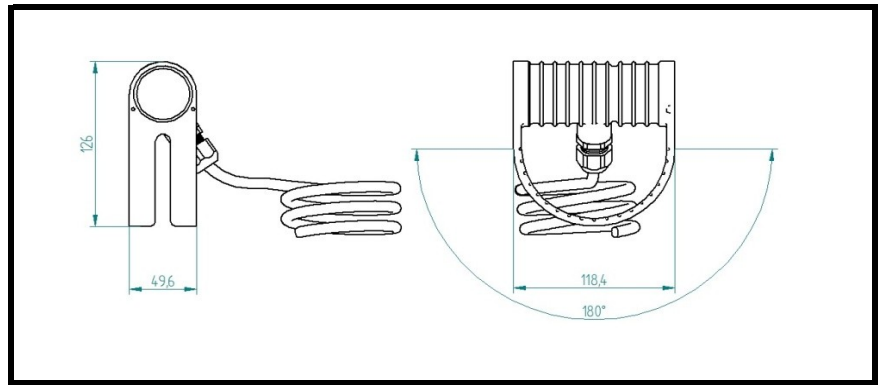

### Electrical specifications

220-240 VAC, 50/60Hz

**6W** (connected power 7.4W)

**4W** (connected power 5.5W)

Safety class I

### Accessories

SPEKTOR\_39 lenses and filters

SPEKTOR\_39 Snoot

SPEKTOR\_39 Glare Shield


SPEKTOR Mounting Adaptor

### Optical specifications


CRI>=80, 3-step McAdams

min LED Lumen flux 723lm (6W)


min LED-lumen flux 524lm (4W)

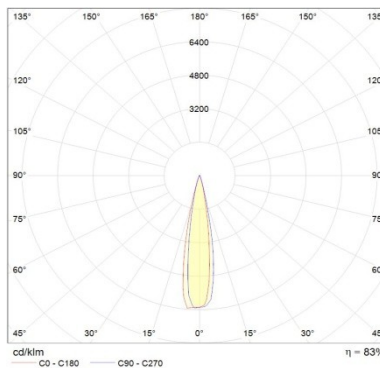


EQUUS\_39

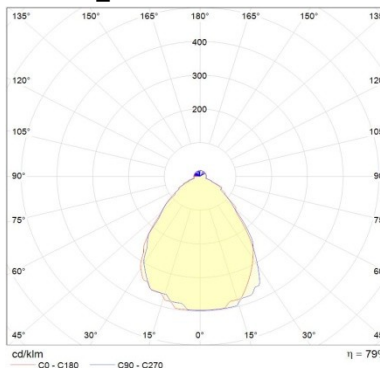

EQUUS\_39+SPEKTOR\_39-80x80

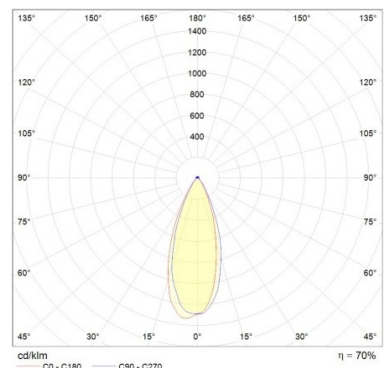

EQUUS\_39+SPEKTOR\_39-30x30

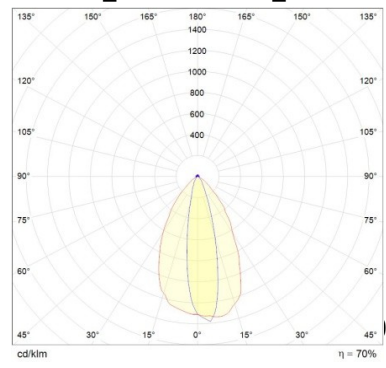

EQUUS\_39+SPEKTOR\_39-60x10